

Installation Instruction

HOLE SIZE

3INCH: 3 5/64" (78mm)
 4INCH: 4 21/64" (110mm)
 6INCH: 6 19/64" (160mm)
 8INCH: 8 5/64" (205mm)




Fig1

1. Turn off the power before installation. Remove the existing fixture if applicable. Determine the location and necessary hole cutout diameter using the supplied table and cut the ceiling hole with the listed approximate diameter

Black — L
 White — N
 Copper — G




Fig2

2. Open the J-Box cover and remove the appropriate knockout(s) on the side panel. Install the appropriate cable clamp(s) (not included) and insert the electrical supply cable through the cable clamp. Connect the supply wires to the fixture wires by using 3 connectors. Attach white to white, black to black, copper to the ground wire.

5 IN 1 27K/30K/35K/40K/50K
 27K/30K/40K/50K/60K
 3 IN 1 30K/40K/50K

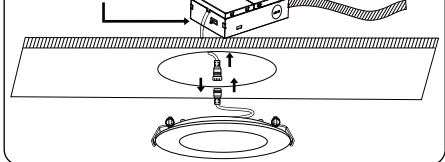


Fig3

3. Insert j-Box through the mounting hole and secure it, connect the fixture power cable to the J-Box. Select lamp color desired with the CCT switch.

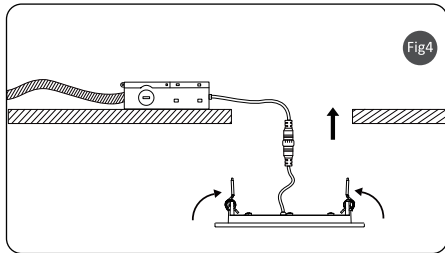


Fig4

4. Push the spring-loaded clips into the mounting hole upwards and in the fixture into it. Release the clips and the fixture will be pulled flush to the ceiling.

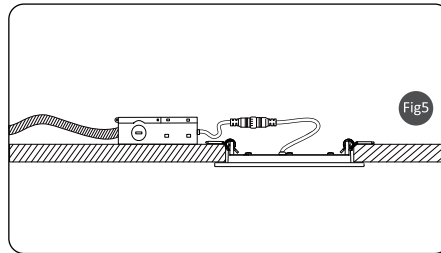


Fig5

5. Turn on the power after installation, check the fixture can work well.